
70" 4K Large Format Display



Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

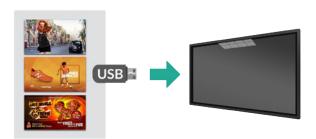

Integrated Android Media Player

There is an integrated Android media player inside the screen allowing you to upgrade to a network version without needing any additional hardware. You can also install third party Android apps if required.



24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.





Remarkable 4K Display

With four times the resolution of Full HD, get amazing picture quality for a truly immersive viewing experience when using HDMl.








450cd/m² Commercial Panel

A commercial grade panel and compents are used to ensure reliable 24/7 use in public spaces. The screen can also be used in landscape or portrait orientation.



Low Power Consumption


The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



Temperature Control


A fanless cooling system keeps their panels and other internal components at the optimum working temperature; ensuring a long and reliable life for your screen.





Multiple Inputs

Should you need to use the screen as a monitor you can connect it to an external source, like a PC or media player, using the HDMI input or the VGA and 5mm audio jack inputs.

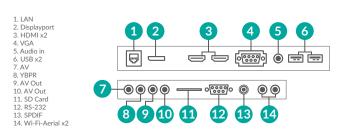

Stunning Enclosure

The precision frame is crafted from black aluminium and assembled in segments so the enclosure can remain sexy and sleek with rounded corners and a tempered glass front for protection. A polymer rear cover keeps the display slim and lightweight.




Power Timer

The eco-friendly power timer allows you to assign daily or weekly on and off times for your screen meaning that it is only in use when it needs to be; improving your environmental efficiency.



RS-232 Control


Remotely control your screens by sending commands over long or short distances using RS-232 protocols, ideal for CCTV control rooms.



Optional Network Upgrade

For a small charge you can upgrade your screen to be networked, allowing you to connect your screen via Wi-Fi, LAN or 4G, then remotely update it over the internet.



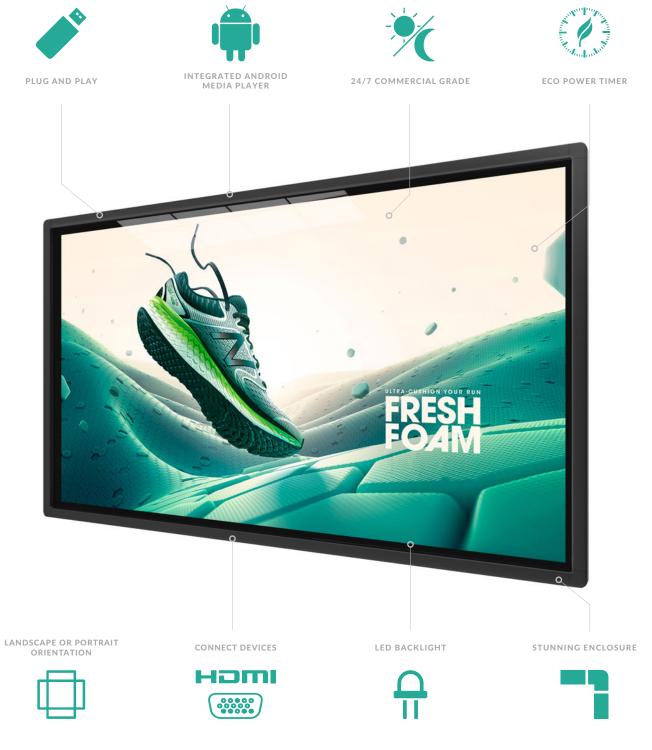









Specification Table

Resolution 3840x2160 Display Area flatio 1538,88,865.6 Aspect Ratio 16.9 Panel Birghtness (cd/m²) 450 Colour 16,7M Viewing Angle 17,8° Audio Speaker Type 300,000 AU Inputs DisplayPort, HDMI x 2, WGA, Audio Int, USB 3.0 x 2, AV Int, YPBPr, SD Card AV Inputs Outputs AV Out, Audio Out, SPDIF Control RS-232 Control Fower Power Consumption (W) 350 Mechanical Power Consumption (W) 350 Mechanical Visit Size (Wark D mm) 1633,1x959,25x112.8 Mechanical VESA Holes (mm) 400,4000/4000/4000/4000 Mechanical VESA Holes (mm) 400,4000/4000/4000 VESA Holes (mm) 400,4000/4000/4000/4000 VESA Holes (mm) 400,4000/4000/4000/4000 VESA Holes (mm) 400,4000/4000/4000 Powersing Finementure 0 °C to 50 °C Forviorence Finementure 0 °C to 50 °C Gross Weight (kg) 71.8 Operating In			70 Inch
Panel Aspect Ratio 16:9 Panel Prightness (α/m²) 450 Colour 16:7M Weining Angle 178° Contrast Ratio 4000:1 Audio Speaker Type 5W, 80 (α²) Audio Speaker Type 5W, 80 (α²) Auton Outputs AV Out, Audio Out, SPDIF Control RS-232 Power Power Consumption (W) 350 Mechanical Power Consumption (W) 350 Mechanical VESA Holes (WAHAD mm) 1633.1959.25x112.8 Mechanical VESA Holes (m) 400x400x100x100x100x100x100x100x100x100x	Panel	Resolution	3840x2160
Panel Brightnes (cd/m²) 450 Colour 16.7M Jewing Angle 178° Contrast Ratio 4000:178° Audio Speaker Type 5W, RQ (κQ) AV Inputs Outputs AW Ont, NY PSPP, SD Card AV Inputs Outputs AV Out, Audio Out, SPDIF Power Power Consumption (W) 350 Package Size (WxHxD mm) 350 Mechanical Package Size (WxHxD mm) 1633.1x959.25x112.8 Mechanical VESA Holes (fm) 1867.11474340 Mechanical VESA Holes (fm) 1867.11474340 Mechanical (fm) Consumption (Windows) 1867.11474340 Mechanical (fm) Consumption (Windows) 1867.11474340 Mechanical (fm) Package Size (WxHxD mm) 1967.11474340 Media Resolution 1920.1660/116000000000000000000000000000000		Display Area (mm)	1538.88x865.6
Colour 16.7M Viewing Angle 178° Contrast Ratio 4000-1 Audio Speaker Type 5W, 8Q (x2) April Inputs DisplayPort, HDMI x2, VGA, Audio In, USB 3.0 x2, AV In, YPBPr, SD Card AV Inputs Outputs AV Out, Audio Out, SPDIF Control R5-232 Power Power Consumption (W) 350 Input Voltage AC110-240V(S0Hz-60Hz) Input Voltage AC110-240V(S0Hz-60Hz) Mechanical VESA Holes (mm) 16331,x959-25x112.8 Mechanical VESA Holes (mm) 16351,x959-25x112.8 Mechanical VESA Holes (mm) 1687x1194x340 Vex Eyes (kg) 51.45 71.8 Net Weight (kg) 51.45 71.8 Floringe Temperature 0 °C to 50 °C Storage Temperature 30°C to 60°C Gorparting Humidity 10% to 80% Floring Humidity 10% to 80% Gorge Temperature 30°C to 60°C Gorge Humidity 10% to 80% Floring Humidity 10% to 80% <		Aspect Ratio	16:9
Meta (Institution) March (Institution) 178° Audio Speaker Ype 5W. 80 (x2) Audio Speaker Ype 5W. 80 (x2) Autinote Injust on DisplayPort, HDMIx 2, VGA, Audio In, USB 3.0 x 2, AV In, VPbPr, SD Card AV Inputs Chord 8.85.22 Injust Voltage AC110-240V(50Hz-60Hz) Injust Voltage AC110-240V(50Hz-60Hz) Injust (Voltage) 1633.1x959-25x112.8 Mechanical Package Size (WxHxD mm) 1867x1194x340 Mechanical Net Weight (kg) 51.45 For six Weight (kg) 71.8 Ferwironmental Storage Humidity 10% to 50°C Ferwironmental Storage Humidity 10% to 80% For Sorage Humidity 10% to 80% For Sorage Humidity 10% to 80% For James Humidity 10% to 80% For James Humidity 10% to 80% For James Humidity 120x to 80% to 80% For Ja		Brightness (cd/m²)	450
Audio Sepaker Type 5W, 80 (x2) AV Inputs DisplayPort, HDM1 x 2, VGA, Audio In, USB 3.0 x 2, AV In, YPBPr, SD Card AV Inputs Outputs AV Out, Audio Out, SPDIF Control RS-232 Power Input Voltage AC110~240V(50H2~60H2) Input Voltage AC110~240V(50H2~60H2) Mechanical VESA Holes (mm) 1633.1v959.25x112.8 Mechanical VESA Holes (mm) 400x400/400x600 Met Weight (kg) 51.45 Gross Weight (kg) 51.45 Gross Weight (kg) 71.8 Operating Temperature 0 °C to 50 °C Operating Humidity 10% to 80% Storage Temperature 30°C to 60°C Operating Humidity 10% to 80% Media Resolution 1920x1080/1080x1920 Coperating Architecture ARM Quad-core Cortex-AS3 1.4GHz Copputer 4Architecture 4Architecture Copputer 4Architecture 4Architecture Copputer 4Architecture 4Architecture Copputer 4Architecture 4Architecture		Colour	16.7M
Audio Speaker Type 5W, 8Q (x2) AV Inputs DisplayPort, HDM1 x 2, VGA, Audion, USB 30 x 2, AV In, YPbPr, SD Card AV Inputs Outputs AV Out, Audio Out, SPDIF Control Rs-232 Power Power Consumption (W) 350 Input Voltage ACC110-246VISOH2-60H2) Mechanical Unit Size Wish Mm m) 1633 x1959 x25x12.8 Mechanical Package Size (WxHxD mm) 1633 x1959 x25x12.8 Mechanical Evil Wish (kg) 1867 x1194x340 Mechanical Ket Weight (kg) 51.45 Gross Weight (kg) 71.8 4 Gross Weight (kg) 71.8 4 Environmental Operating Temperature 0 °C to 50 °C Operating Humidity 10% to 80% 4 Storage Humidity 10% to 80% 4 Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) 4 Purport Architecture Architecture 64-bit CPU Anamy Audio Core Cortex-AS3 J.4GHz 4 RAM 2CB DDR3 4		Viewing Angle	178°
Injusts		Contrast Ratio	4000:1
AV Inputs Outputs AV Out, Audio Out, SPDIF Control RS-232 Power Power Consumption (W) 350 Input Voltage AC110-240V(50Hz-60Hz) MEAN AC110-240V(50Hz-60Hz) Mechanical VESA Holes (mm) 16833.1x959.25x112.8 Mechanical VESA Holes (mm) 400x400/400x600 Net Weight (kg) 51.45 Gross Weight (kg) 71.8 Operating Temperature 0 °C to 50 °C Operating Humidity 10% to 80% Storage Humidity 10% to 80% Storage Humidity Video (MPG, AVI, MPA, R, MR, MS, S), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Feronats Video (MPG, AVI, MPA, R, R, MR, MR, S), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Resolution 1920x1080/1080x1920 COPU ARRM Quad-core Cortex-A53 1.4GHz Environmental Graphic Engine Mali450MP4 (6-core) 450MHz Lorenture Graphic Engine Mali450MP4 (6-core) 450MHz Lorenture Malifecture 64-bit Computer Graphic Engine Mali450MP4 (6-core) 450MHz	Audio	Speaker Type	5W, 8Ω (x2)
Power Onsumption (W) RS-232 Power Onsumption (W) 350 Input Voltage ACT10-240V(50Hz-60Hz) Input Voltage ACT10-240V(50Hz-60Hz) Menanted Institute (WHxD mm) 16331x/959_25x112.8 Mechanical Yes (WHxD mm) 1867x1194x340 Method (R) 400x400/400x600 Met Weight (kg) 51.45 Ke Weight (kg) 71.8 Operating Temperature 0 °C to 50 °C Operating Humidity 10% to 80% Operating Humidity 10% to 80% Storage Temperature Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARRM Quad-core Cortex-AS3 1.4GHz Computer Gaphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 USB USB 3.0 x 2, USB 2.0 x3 Wi-Fi 802.11b/g/n/ac Wi-Fi 802.11b/g/n/ac	AV Inputs	Inputs	DisplayPort, HDMI x 2, VGA, Audio In, USB 3.0 x 2, AV In, YPbPr, SD Card
Power Power Consumption (W) 350 Injut Voltage AC110~240V(50Hz~60Hz) Injut Voltage AC110~240V(50Hz~60Hz) Mephanical Init Size (WXHXD mm) 16331x959.25x112.8 Package Size (WXHXD mm) 1867x1194x340 Mechanical Yes Holes (mm) 400x400/400x600 Net Weight (kg) 51.45 Gross Weight (kg) 71.8 Storage Image Temperature 0 °C to 50 °C Goerating Humidity 10% to 80% Storage Humidity 10% to 80% Storage Humidity 10% to 80% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 ACM 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android S.0.1 Macessories		Outputs	AV Out, Audio Out, SPDIF
Power Input Voltage AC110-240V(50Hz-60Hz) MeAname Unit Size (WxHxD mm) 1633.1x959.25x112.8 Mechanical VESA Holes (mm) 400x400/400x6000 Met Weight (kg) 51.45 Gross Weight (kg) 71.8 Operating Temperature 0 °C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Farbite Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Mecessories Optional Remote Control, User Manual, Power Lead Optional Network Upgrade		Control	RS-232
Input Voltage	Power	Power Consumption (W)	350
Mechanical Package Size (WxHxD mm) 1867x1194x340 Mechanical VESA Holes (mm) 400x400/400x600 Net Weight (kg) 51.45 Gross Weight (kg) 71.8 Package Size (WxHxD mm) 0°C to 50°C Gross Weight (kg) 0°C to 50°C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1380x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Graphic Engine Mali4SOMP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/gir/ac Wi-Fi 802.11b/gir/ac OS Android 5.0.1 Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty		Input Voltage	AC110~240V(50Hz~60Hz)
Mechanical VESA Holes (mm) 400x400/400x600 Net Weight (kg) 51.45 Gross Weight (kg) 71.8 Environmental Operating Temperature 0°C to 50 °C Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet WIFE 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty	Mechanical	Unit Size (WxHxD mm)	1633.1x959.25x112.8
Net Weight (kg) 51.45 Gross Weight (kg) 71.8 Environmental Operating Temperature 0 °C to 50 °C Environmental Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Computer Fard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Optional Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty		Package Size (WxHxD mm)	1867x1194x340
Formation Form		VESA Holes (mm)	400x400/400x600
Environmental 0 °C to 50 °C Environmental 5 torage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5 to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB.TS), Audio (MP3, WMA), Image (JPG, GJF, BMP, PNG) Media Resolution 1920×1080/1080×1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Farabic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB 3.0 x 2, USB 2.0 x 3 LAN LN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade		Net Weight (kg)	51.45
Environmental Storage Temperature -30°C to 60°C Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit USB 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Warranty Warranty Period 3 Year Warranty		Gross Weight (kg)	71.8
Part	Environmental	Operating Temperature	0 °C to 50 °C
Operating Humidity 10% to 80% Storage Humidity 5% to 95% Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB 3.0 x 2, USB 2.0 x 3 USB 3.0 x 2, USB 2.0 x 3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Storage Temperature	-30°C to 60°C
Media Formats Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG) Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Operating Humidity	10% to 80%
Media Resolution 1920x1080/1080x1920 CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Storage Humidity	5% to 95%
CPU ARM Quad-core Cortex-A53 1.4GHz RAM 2GB DDR3 Architecture 64-bit Computer Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty	Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
RAM 2GB DDR3 Architecture 64-bit Computer Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Media Resolution	1920x1080/1080x1920
Architecture 64-bit Computer Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		CPU	ARM Quad-core Cortex-A53 1.4GHz
Computer Graphic Engine Mali450MP4 (6-core) 450MHz Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		RAM	2GB DDR3
Hard Drive/Internal Memory (eMMC) 16GB USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Architecture	64-bit
USB USB 3.0 x 2, USB 2.0 x3 LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Graphic Engine	Mali450MP4 (6-core) 450MHz
LAN 10/100 Ethernet Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		Hard Drive/Internal Memory (eMMC)	16GB
Wi-Fi 802.11b/g/n/ac OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		USB	USB 3.0 x 2, USB 2.0 x3
OS Android 5.0.1 Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Period 3 Year Warranty		LAN	10/100 Ethernet
Accessories Included Remote Control, User Manual, Power Lead Optional Network Upgrade Warranty Warranty Marranty Period 3 Year Warranty		Wi-Fi	802.11b/g/n/ac
Accessories Optional Network Upgrade Warranty Period 3 Year Warranty		OS	Android 5.0.1
Optional Network Upgrade Warranty Period 3 Year Warranty Warranty	Accessories	Included	Remote Control, User Manual, Power Lead
Warranty		Optional	Network Upgrade
Warranty Technical Support Lifetime	Warranty	Warranty Period	3 Year Warranty
		Technical Support	Lifetime



