

Specifications

SMART Board® MX275-V2 interactive display with iQ

Model SBID-MX275-V2

Overview


The SMART Board® MX275-V2 interactive display has all the essentials educators need for bringing the devices students love into any learning environment. This display is great value for schools that need an interactive display on a budget. The 75" 4K Ultra HD resolution display includes a one-year subscription to SMART Learning Suite and a standard three-year warranty.

The iQ experience offers one-touch access to SMART Learning Suite applications, including SMART Notebook® lessons and activities. You can also access collaboration tools, including a digital whiteboard, a web browser, and wireless screen sharing.



Dimensions and weights¹

Dimensions

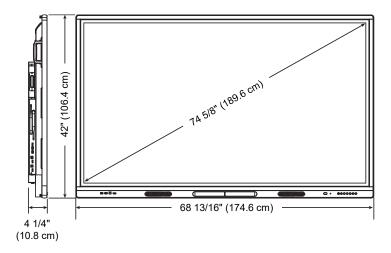

Weight

142 lb. (64.3 kg)

Active touch area

66 1/2" × 38" (168.8 cm × 96.6 cm)

Active image area

65" × 36 1/2" × (165 cm × 92.8 cm)

Shipping dimensions (including pallet)

75" W × 50 1/4" H × 11 5/8" D (190.5 cm × 127.7 cm × 29.5 cm)

Shipping weight

192 lb. (87 kg)



As an ENERGY STAR® certified signage display, the SMART Board MX075-V2 interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

Hardware

Interaction

Touch technology HyPr Touch™ with Advanced IR

Multitouch capabilities Up to 20 simultaneous touch, writing, or erase points 23

Object Awareness™ Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger or

palm.

Positioning accuracy <2 mm

Display

Type LED backlit LCD (A grade)

Aspect ratio 16:9

Resolution 4K UHD (3840 × 2160)

Horizontal frequency 31 Hz–140 kHz

Vertical frequency 59 Hz–70 Hz

Brightness (maximum) ≥400 cd/m²

Refresh frequency 60 Hz

Pixel clock (maximum) 600 MHz

Pixel dimensions 0.43 mm

Viewing angle 178°

Response time (typical) 8 ms

Ambient light sensor Yes

Bluetooth® Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)

Audio 15 W integrated speakers (×2)

Wireless IEEE 802.11a/b/g/n/ac with 2 × 2 MIMO (both 2.4 and 5 GHz bands)

Included cables and

accessories

Country-specific power cable

16' 5" (5 m) USB cable

Wall mount bracket kit

Pen (×2) Antenna (×2)

IR remote control (with two AAA batteries)

Mounting holes For a standard VESA® 600 mm × 400 mm mounting plate with M8 screws

Mounting bracket depth Minimum clearance depth of 11/4" (3 cm) for all components on the back of the interactive

display for airflow

 $^{{}^2\}text{Requires the latest version of SMART Product Drivers to be installed. Some applications might not support all touch points.}$

 $^{^3}$ Chrome OS is limited to 10 simultaneous touches. Pens and eraser are not supported.

iQ experience

iQ experience iQ experience embedded in the display provides better performance without the need to install

a separate appliance

Whiteboard

Included apps and

Customizable Home screen

features

SMART Notebook Player

Browser Screen Share File and app libraries

Writing and drawing over any input Freeze screen and screen shade Automatic software updates

Supported languages

Chinese (simplified)

Chinese (traditional)

Danish
Dutch
English
Finnish
French
German

Hungarian (anticipated release May 2020)

Italian Korean Norwegian Portuguese Russian Spanish Swedish Ukrainian Vietnamese

Software

Included iQ Android-based embedded computing software SMART Ink and SMART Product Drivers

One-year subscription to SMART Learning Suite (including SMART Notebook software)

SMART Notebook basic version

Other software (sold separately)

SMART Cloud-based device management software for remotely maintaining, supporting, controlling, and securing Remote the display and your other devices. Comes installed on the display and can be used as a 30-day trial

Management before activation. See SMART Remote Management for more information.

Connectors

Side connector panel

- Accessory slot (for 60W OPS devices)
- HDMI® 2.0 out with HDCP 2.2 support⁴
- 1 USB 2.0 Type-A (for service use only)
- USB 3.0 Type-A (for currently selected input source) 1

HDMI 1

- HDMI 2.0 in with HDCP 1.4 and HDCP 2.2 support
- USB 3.0 Type-B (for touch) 1

HDMI 2

- 1 HDMI 2.0 with HDCP 1.4 and HDCP 2.2 support
- 1 USB 3.0 Type-B (for touch)

Front connector panel

- USB 2.0 Type-A (for the display)
- USB 2.0 Type-A (for currently selected input source)

HDMI 3

- 1 HDMI 2.0 in with HDCP 1.4 and HDCP 2.2 support
- 1 USB 2.0 Type-B (for touch)

Bottom connector panel

- RS-232 1
- 2 RJ45
- 1 S/PDIF out (fixed)
- 1 Stereo 3.5 mm out (variable)

VGA 1

- Stereo 3.5 mm in (for VGA in)
- VGA in
- USB 3.0 Type-B (for touch)

Installation requirements

Interactive display

See the SMART Board MX (V2) and MX (V2) Pro series interactive displays installation and maintenance guide (smarttech.com/kb/171555)



IMPORTANT

The display needs an internet connection for downloading and installing important updates. Ask the network administrator to configure the network correctly for the iQ experience. For more information about network configuration, see Connecting a SMART display with the iQ experience to a network.

Room computers and guest laptops

General requirements

See SMART Notebook software release notes

4K UHD

Video card that can support 3840 × 2160 resolution at 60 Hz

See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

⁴HDCP is always enabled. Content is shown in 480p resolution if the external display doesn't support HDCP.

Cable requirements

HDMI Maximum length: 23' (7 m)

NOTES

- Use only certified HDMI cables that have been tested to support the performance standard you require.
- The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality.

USB 2.0 USB 2.0 certified

Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)

USB 3.0 USB 3.0 certified

SuperSpeed (5 Gbps) support Maximum length: 9' (3 m)

NOTES

- SMART supports only installations that use directly connected video and USB cables, AC-powered extenders, or USB extenders purchased from SMART.
- You might be able to use higher-grade cables that are longer than specified. If you have
 problems with such a cable or an extender of any type, test the connection with a shorter
 cable before contacting SMART Support.

Important

Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to *Installation best practices for SMART products* (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Standalone interactive display power consumption at 77°F (25°C)

Standby mode ≤0.5 W

Normal operating (out-of-box)

114 W

Operating temperature 41–95°F (5–35°C)

Storage temperature -4-140°F (-20-60°C)

Humidity 5–80% relative humidity, non-condensing

Certification and compliance (Model ID: IDX75-2)

U.S. / Canada FCC, ISED, UL, CONEG Packaging, Cal Prop 65, Conflict Minerals, Energy Star

SPECIFICATIONS

SMART BOARD MX275-V2 INTERACTIVE DISPLAY WITH IQ - MODEL SBID-MX275-V2

EU / EEA / EFTA CE - LVD, RED, REACH, RoHS, Battery, WEEE, Packaging

EAEU FAC

Australia / New Zealand **RCM**

Taiwan BSMI, NCC

Vietnam ICT

South Africa NRCS, ICASA

Purchasing information

Order number

SBID-MX065-V2-PW SMART Board MX065-V2 Pro interactive display – White SBID-MX075-V2-PW SMART Board MX075-V2 Pro interactive display – White

SBID-MX275-V2 SMART Board MX075-V2 interactive display with iQ and one-year subscription of SMART

SBID-MX086-V2-PW Learning Suite

SMART Board MX086-V2 Pro interactive display – White

Optional accessories

Other See smarttech.com/accessories

Warranty information

SMART Assure warranty Includes advanced hardware replacement and access to onsite support. Terms and conditions vary by region. Contact your local reseller or distributor for information and visit smarttech.com/warranty.

smarttech.com/support smarttech.com/contactsupport

© 2020 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, Pen ID, HyPr Touch, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. April 3, 2020.