

SMART Board® GX Zero series





Display	
Screen sizes (diagonal)	65" 75" 86"
Backlight	LED
Aspect ratio	16:9
Maximum display resolution	4K UHD (3840 × 2160)
Refresh rate	60 Hz
Lifespan	≥ 50,000 hours
Brightness ¹	400 cd/m²
Display response time	≤ 8 ms
Viewing angle	178°
Glass	Full heat-tempered Anti-glare Bonded
Frame color	Black
Convenience buttons	Power Home Volume Freeze frame
Sensors	Ambient light Infrared
Audio	2 integrated 20W speakers with high fidelity audio

Embedded software	
Operating system	Not available
PC computing	
OPS support2	SMART PCM or AMG1 modules
PC module power supported OPS	90 W
Optional computing module	See > smarttech.com/accessories

Interactive experience	
Touch technology	Advanced infrared
Touch features	Simultaneous tool differentiation3 Object Awareness™4 Silktouch™
Typical touch response time	≤ 8 ms
Frame rate	≥ 125 Hz
Accuracy	1 mm
Minimum object size	2 mm
Multitouch capabilities	40 – Windows® 20 – Mac 10 – Chrome OS™
Tools included	Pens (×2)
Tool holders	Magnetic Frame-mounted
Software	
Included	SMART Notebook® SMART Product Drivers and SMART Ink®
Optional	SMART Notebook Plus Lumio™ SMART Meeting Pro®

SMART TeamWorks™

¹Brightness of individual displays can vary.

 $^{^2}$ The support and performance of third-party OPS (Open Pluggable Specification) and OPS-C modules may vary. Conduct proper compatibility testing to avoid potential issues.

³A connected computer with SMART Product Drivers is required.
Only supported in SMART Notebook and SMART Ink.

 $^{^4\}mbox{When}$ connected to a computer with SMART Product Drivers

Inputs	Front	Back
OPS PC accessory slot	-	1
HDMI® 2.0 with HDCP 1.4 and HDCP 2.2 support	1	2
Display Port 1.2	-	1
VGA video	-	1
Stereo 3.5 mm (variable)	-	1
RS-232 (DB-9 connector)	-	1
RJ45 (LAN IN)	-	1
USB Type-C 4K @ 60Hz Display Port alternate mode, touch, digital audio, USB 3.2 Gen 1 (DFP) for peripherals; 15 W power delivery	1	-
USB Type-C 4K @ 60Hz Display Port alternate mode, touch, digital audio, USB 2.0 Hi-Speed USB	-	1
USB 2.0 Type-A	-	1
USB 3.2 Gen 1 Type-A	2	2
USB 2.0 Type-B	1	1

Outputs	Front	Back
HDMI 2.0 with HDCP 1.4 and 2.2 support	-	1
Stereo 3.5 mm (variable)	-	1
S/PDIF optical (fixed)	-	1
RJ45 (LAN OUT)	-	1

Included cables and accessories	Qty
Country-specific power cable	1
16' 5" (5 m) USB 2.0 A to B cable	1
6' (1.8 m) USB Type-C cable	1
Pens	2
Remote control	1
AAA batteries	2
Illustrated installation instructions	1
Important information document	1

Storage and operating requirements	
Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	32-104°F (0-40°C)
Storage temperature	14-140°F (-10-60°C)
Humidity	20–80% relative humidity, non-condensing

Power consumption	
Typical	65": 79 W
	75": 88 W
	86": 119 W
Standby	<0.5 W

Certification and compliance	
Regulatory models	IDGX65-2 IDGX75-2 IDGX86-2
US / Canada	cULus FCC ISED TSCA CONEG Packaging Proposition 65
EU / EEA / EFTA / UK	CE UKCA LVD CB EMCD RED REACH RoHS Battery WEEE Packaging POP Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR® HDMI HDCP

Purchasing information ⁶	
Order numbers	
GX065-V3	SMART Board® GX065-V3 interactive display, no embedded OS
GX075-V3	SMART Board GX075-V3 interactive display, no embedded OS
GX086-V3	SMART Board GX086-V3 interactive display, no embedded OS

Optional accessories	
	See > smarttech com/accessories

MARI Warranty	
	Terms and conditions and warranty upgrade options vary by region. Visit smarttech.com/warranty or contact your reseller for information.

 $^{^5 \}mbox{Product}$ availability may vary by region.

This product has received additional certifications not listed here.

⁶Order numbers may vary by region.

Cable requirements

See > SMART cables and connectors guide (docs.smarttech.com/kb/171926)




Installation, dimensions, and weights

Notes

- All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).
- Product ships upright.

65" models

Dimensions



Weight

82 lb. (37 kg)

Shipping dimensions (including pallet)

63 3/4" × 45 7/8" × 6 1/4" (162 cm × 116.5 cm × 16 cm)

Shipping weight

118 lb. (54 kg)

VESA mount


M8 | 600 × 400 mm

Handles

2

75" models

Dimensions

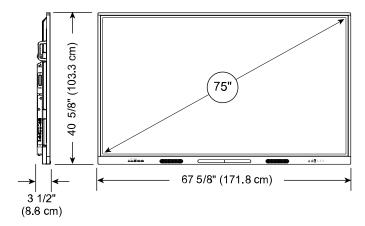

Weight

114 lb. (52 kg)

Shipping dimensions (including pallet)

71 5/8" × 50 5/8" × 6 1/4" (182 cm × 128.5 cm × 16 cm)

Shipping weight

158 lb. (71 kg)

VESA mount

M8 | 800 × 400 mm


Handles

2

Installation, dimensions, and weights (continued)

86" models

Dimensions

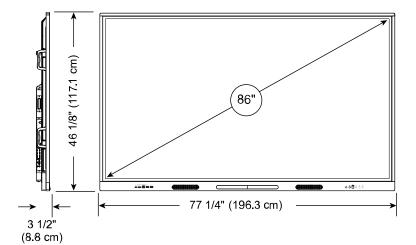

Weight

143 lb. (65 kg)

Shipping dimensions (including pallet)

85 1/4" × 56 7/8" × 6 1/4" (216.5 cm × 144.5 cm × 16.0 cm)

Shipping weight

198 lb. (90 kg)

VESA mount

M8 | 800 × 600 mm

Handles

4

smarttech.com smarttech.com/contact

© 2024 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, Lumio, SMART Meeting Pro, SMART TeamWorks, SMART Ink, Simultaneous Tool Differentiation, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the US and/or other countries. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Chrome OS is a trademark of Google Inc. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following US patents: www.smarttech.com/patents. Contents are subject to change without notice. May 24, 2024.

docs.smarttech.com/kb/171947 5