# 50" Infrared Freestanding Multi Touch Screen Posters with Dual OS




#### **Dual OS - Windows & Android**

Both Android and Windows operating systems are installed on the integrated PC for ultimate flexibility. These displays provide a fully integrated solution - whether your application calls for Android or Windows.



# 450cd/m<sup>2</sup> IPS Panel

Commercial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy. These panels are designed to achieve ultimate lifelike colour temperature in portrait orientation.



# **10 Point Infrared Touch**

Having up to 10 touch points allows you to manipulate images, zoom in an out as well as perform many other touch gestures; much like you would with a domestic tablet. It also allows for multiple users interacting with the screen at one time.




#### **Internal Locker**

Should you need to connect the screen to an external source, like a PC or media player, you can use the USB and HDMI or VGA inputs and hide the player inside the internal locker.




#### Low Power Consumption

The LED backlight technology provides improved brightness and contrast. Their lifespan is drastically improved to over 70,000 hours and the power consumption is reduced by around 30%.



# **Multiple Inputs**

If the integrated PC is not powerful enough for your application you can connect an external PC or media player, via HDMI or VGA for the AV signal and USB for the interactivity.



#### **Stunning Enclosure**

The powder coated steel enclosure has a super slim profile and rounded corners to add to the captivating tablet-like aesthetics as well as protecting the internal components from potential damage.



# Wide Viewing Angle

Thanks to the IPS technology these displays provide fantastic image quality with a remarkable viewing angle of 178° in portrait orientation.



#### 24/7 Commercial Use

These displays use a commercial grade LCD panel and LED backlight. They have the ability to be in constant use 24/7 for over 70,000 hours and have no external buttons or controls to avoid tampering.





# **Integrated Castors**

These freestanding displays are a fully potable solution as they feature integrated castors as well as retractable feet for more permanent installations.



#### **Integrated Speakers**


The displays feature two integrated slimline speakers for applications that require an audio element.



# Touch CMS

For a small charge you can take advantage of our user-friendly CMS, allowing you to conveniently create your own interactive content.



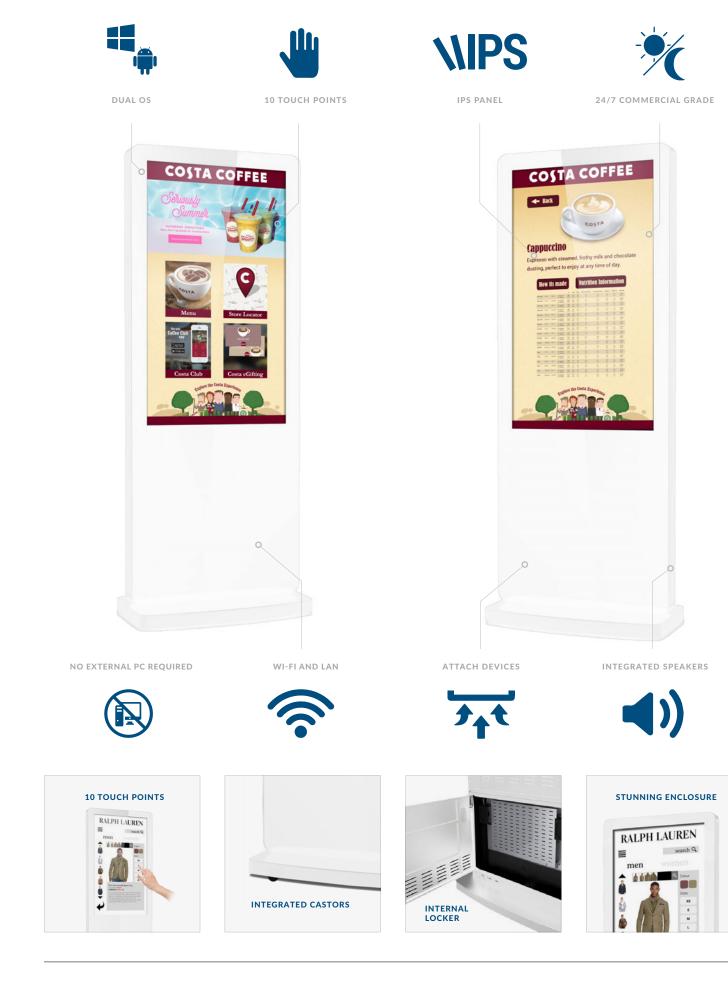

# Specification Table

		50 inch
Panel	Resolution	1080x1920
	Display Area (mm)	625.4x1106.4
	Aspect Ratio	16:9
	Brightness (cd/m²)	450
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	5000:1
Touch	Touch Technology	Infrared
	Touch Points	10
	Glass Hardness	7H minimum
Audio	Speaker Type	2W, 5Ω (x2)
AV Inputs	Video	HDMI, VGA
	Audio	Audio Socket (3.5mm)
Power	Power Consumption (W)	105
	Input Voltage	AC110~240V (50Hz~60Hz)
Mechanical	Unit Size (WxHxD mm)	1850x766x79.5
	Package Size (WxHxD mm)	2000x920x565
	Footprint (WxD)	779x400
	Net Weight (kg)	72
	Gross Weight (kg)	82
Environmental	Operating Temperature	0 °C to 50 °C
	Storage Temperature	-30°C to 60°C
	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
Computer	CPU	Intel® Atom <sup>™</sup> (Quad-core) x5-Z8350 Processor (2M Cache, up to 1.92 GHz)
	RAM	4GB (DDR3L-RS 1600MHz)
	Instruction Set	64-bit
	Graphic Engine	Intel® HD Graphics 400 (8th Gen, Supports DirectX11.2, OpenGL4.4 and OpenCL 2.0)
	Hard Drive/Internal Memory (eMMC)	64GB
	USB	2 x USB 2.0
	LAN	10/100/1000 Ethernet
	Wi-Fi	802.11b/g/n
	OS	Android 5.1.1, Windows® 8 /8.1 64-bit, Windows® 10 Pro 64-bit (licence purchased separately)
	Other	No accessible buttons or controls
Accessories	Included	Remote Control, User Manual, Power Cable, USB to USB Cable, Wi-Fi Aerial

#### Errors and omissions excepted



